

IR Quattro HD-2 24 m






Fine work on a large area.

- Offers the largest detection range in our IR range
- 5,200 switching zones for finest detection
- 4 pyro sensors can be individually de-/activated
- Sensitivity digitally adjustable
- Ideal for open-plan offices and classrooms

 Bluetooth
MESH









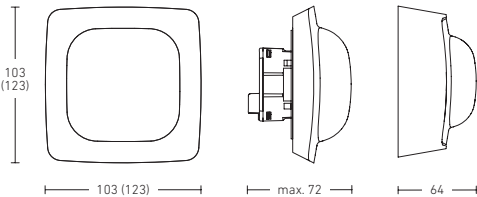




 professional line

 <p>Bluetooth Mesh for fast, energy-saving connections</p>	 <p>Detects the smallest movements with 5200 switching zones</p>	 <p>Measures brightness for automatic lighting control</p>	 <p>Temperature measurement on the IP, KNX and DALI-2 IPD bus interfaces</p>	 <p>Humidity measurement on the IP, KNX and DALI-2 IPD bus interfaces</p>
---	---	---	--	--

Infrared presence detector

IR Quattro HD-2 24 m



 <p>360° PIR with square detection</p>	 <p>Detection zone 9 x 9 m presence</p>	 <p>Max. 10 m mounting height</p>	 <p>Configuration via the STEINEL Connect app</p>	 <p>Electronic sensitivity adjustment of the four pyro sensors</p>
 <p>UV-protected material</p>				<p>Order details (concealed wiring)</p> <p>COM1 4007841 064310 COM2 4007841 064334 DALI-2 APC* 4007841 064358 DALI-2 IPD 4007841 064372 KNX 4007841 064846 IP 4007841 065959 BT IPD (Slave) 4007841 064396</p>
<p>Further presence detectors in the latest generation</p>				
 <p>True Presence®</p>	 <p>True Presence® Multisensor</p>			
 <p>HF 360-2</p>	 <p>Hallway</p>			
<p>Order details (surface mounting)</p> <p>COM1 4007841 064327 COM2 4007841 064341 DALI-2 APC* 4007841 064365 DALI-2 IPD 4007841 064389 KNX 4007841 064853 IP 4007841 065942 BT IPD (Slave) 4007841 064402</p> <p>Order details (recessed mounting)</p> <p>COM1 4007841 079406 KNX 4007841 079413</p>				

*from the 2nd half of 2023